# **Operation**




#### Touch screen:

Use stylus or fingertip to select icon for specific function

#### Operate button:

Switch on and measure

# **Overview of Main Menu**

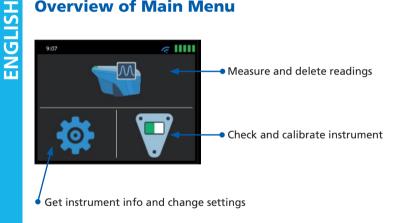

# **How to take Readings?**



Click on instrument icon and select color sample from work list



- Place instrument on sample and select "+"
- Press operate to take a reading and follow instructions on the screen

Note: All readings are automatically saved. They can be transferred to a computer with the AkzoNobel Color Retrieval software.



## Add coarseness (optional)

 Select coarseness index from list and confirm with "✓"



### Add car make (optional)

- Select car make from list and confirm with "✓"
- Use "magnifier" to search for specific name or letters



## **How to Delete Readings?**



- Click on instrument icon to have the work list loaded
- The "✓" in front of a color sample indicates that a reading is stored
- Select respective color sample from list
- Click on the delete icon "X" and confirm the delete operation with "V"

# How to change Configuration?



Info on catalog number, firmware version, calibration date, battery status, WLAN connection etc.



- Wireless connection on/off
- Select available WLAN





• Execute readings by pins on/off





Turn beeper on/off





Rotate display for right / left hand operation



Select language



Run instrument diagnosis

## **How to Check and Calibrate?**



#### White calibration

- Click on white tile icon
- Place unit on white tile and press operate button
- Place unit on green tile and press operate button

#### Green check

- Click on green tile icon
- Place unit on green tile and press operate button

If the values are out of tolerance, a loop is started to repeat the reading, clean the tile and if this does not help, contact technical service

White calibration is requested every 30 days, green tile check every 7 days. The days left are shown on the instrument display.